



CONTROL PANEL  
(INSTALLED IN CABIN).


BOLT C'TR LAY OUT



REMOTE CONTROLS

**NOTES**

1. MAX. ANGLE OF INSTALLATION: 15°
2. MIN. PROPELLER TIP CLEARANCE: 1"

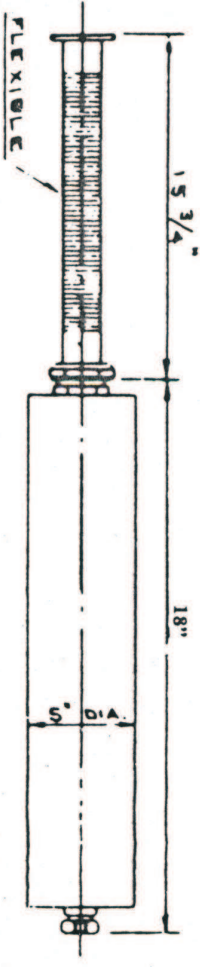

To calculate your Stern Gear requirement, we only need the 'A' dimension below.  
Where limited space does not allow the standard Stern Gear to be used — it is possible to omit one Layrub Coupling and the Cardan Shaft, provided a floating inboard bearing is used.

DOLPHIN YACHT ENGINES LTD.

DIRECT DRIVE 12 HP "DOLPHIN"

SCALE 1 1/4" = 3"  
SEPTEMBER 1926

DVS.  
10-1

# DOLPHIN ENGINES

Pollards Mill - Long Lane - High St - St Austell - PL26 7SX  
[www.dolphinengines.co.uk](http://www.dolphinengines.co.uk)  
 Tel: +44 (0)1726 824726  
 E-Mail: [info@dolphinengines.co.uk](mailto:info@dolphinengines.co.uk)